

Cush-A-Block® Rooftop Support System

75% Faster Strut Install and Change-Out










- 100% Recycled Rubber Qualifies for LEED Credits
- Meets the Buy America Act and ARRA
- Resistant to Freeze and Thaw

- Dampens Vibrations
- Compatible with Most Rooftop Materials
- Eco-Green Reflective Safety Strip Won't Peel or Flake

Cush-A-Block is manufactured under U.S. patent D824749 and one pending, and Canadian patents #175942 and one pending

CUSH-A-BLOCK - CBN SERIES

SUPPORT WITH METAL CHANNEL



The CBN Series provides a longer mounting surface. Custom lengths are available upon request

Part No.	No. of Bases	Height	Strut Length	Total Length	Uniform Load Lbs (kN)*		
CBN-Support With 13/16" (21mm) Pre-Galv. or Hot Dip Galv. Steel Channel							
CBN1S	1	4- ¹³ / ₁₆ " (122mm)	10" (254mm)	10- ¹ /2" (267mm)	2,500 * (11.12 kN)		
CBN2S	2		23- ¹ /2" (597mm)	24" (610mm)	5,000 * (22.24 kN)		
CBN3S	3		35- ¹ /2" (902mm)	36" (914mm)	7,500 * (33.36 kN)		
CBN4S	4		47- ¹ /2" (1.2m)	48" (1.2m)	10,000 * <i>(44.48 kN)</i>		
CBN-Support With 1-5/8" (41mm) Pre-Galv. or Hot Dip Galv. Steel Channel							
CBN1D	1	5- ⁵ /8" (143mm)	10" (254mm)	10- ¹ /2" (267mm)	2,500 * (11.12 kN)		
CBN2D	2		23- ¹ /2" (597mm)	24" (610mm)	5,000 * (22.24 kN)		
CBN3D	3		35- ¹ /2" (902mm)	36" (914mm)	7,500 * (33.36 kN)		
CBN4D	4		47- ¹ /2" (1.2m)	48" (1.2m)	10,000 * <i>(44.48 kN)</i>		
CBN Support With 2-7/16" (62mm) Pre-Galv. or Hot Dip Galv. Steel Channel							
CBN1RD	1	6- ⁷ / ₁₆ " (164mm)	10" (254mm)	10- ¹ /2" (267mm)	2,500 * (11.12 kN)		
CBN2RD	2		23- ¹ /2" (597mm)	24" (610mm)	5,000 * (22.24 kN)		
CBN3RD	3		35- ¹ /2" (902mm)	36" (914mm)	7,500 * (33.36 kN)		
CBN4RD	4		47- ¹ /2" (1.2m)	48" (1.2m)	10,000 * <i>(44.48 kN)</i>		
* T	* This load is only for the capacity of the components in this assembly.						

Please consult roofing manufacturer or engineer for roof load capacity.

Solar Racking | Pipe & Conduit | HVAC | Rooftop Walkways




Cush-A-Block

Rooftop Support System

CUSH-A-BLOCK - CBN SERIES

PLAIN BASE






CBN-Base Series				
Part No.	Uniform Load Capacity (Lbs) *			
CBN	2,500 * (11.12 kN)			

* This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CUSH-A-BLOCK MINI - CBM SERIES

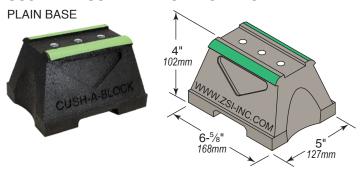


Part No.	Uniform Load Capacity (Lbs) *
CBM	400 (11.78 kN)

^{*} This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CUSH-A-BLOCK MINI WITH RAISED CUSH-A-RING

Support with Raised SPH Cush-A-Ring Clamp for Copper Tube or Steel Tube or Pipe




Support With Raised SPP Cush-A-Ring Clamp for PEX, CPVC, or PVC Pipe



CUSH-A-BLOCK MINI - CBM SERIES

SUPPORT WITH METAL CHANNEL

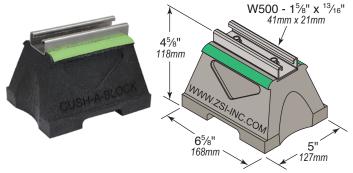

Part No.	Uniform Load Capacity (Lbs) *			
CBM-Support With 13/16" Pre-Galv. or Hot Dip Galv. Steel Channel				
CBM1S	400 (11.78 kN)			
CBM-Support With 1-5/8" Pre-Galv. or Hot Dip Galv. Steel Channel				
CBM1D	400 (11.78 kN)			
*TI: 1 1: 1 0 0 1: 0: 0: 0: 0: 0: 0: 0: 0: 0: 0: 0: 0: 0:				

^{*} This load is only for the capacity of the components in this assembly. Please consult roofing manufacturer or engineer for roof load capacity.

CUSH-A-BLOCK MINI WITH RAISED STRUT

Support with Raised 1-5%" Pre-Galv. or Hot Dip Galv. Metal Channel



Call ZSi-Foster at (800) 323-7053 or order now at zsi-foster.com









Strapbinder[®]









